



COMMERCIAL LAUNDRY SYSTEMS

GIANT-C⁺




GIANT-C⁺

Washer

		Non-Heater	Heater
CYLINDER			
Drum Volume	cu.ft (l)	3.6 (102.7)	3.6 (102.7)
Diameter	in.(mm)	22.1 (560)	22.1 (560)
Depth	in.(mm)	16.5 (419.3)	16.5 (419.3)
Capacity	lb (kg)	22.5 (13)	22.5 (10.2)
DIMENSIONS			
Product (WxHxD)	in. (mm)	27 (686) x 38.7 (983) x 30.2 (767)	27 (686) x 38.7 (983) x 30.2 (767)
With Door Opening	in. (mm)	50.8 (1,291)	50.8 (1,291)
Carton (WxHxD)	in. (mm)	29.7 (755) x 44.4 (1,127) x 31.3 (795)	29.7 (755) x 44.4 (1,127) x 31.3 (795)
Weight (Product/Carton)	lb (kg)	191.8 (87) / 211.6 (96)	191.8 (87) / 211.6 (96)
SPEED			
Wash	RPM	50	50
Extract (High Speed)	RPM	1,150	1,150
G-force	G	413	413
ENERGY			
Electric Ratings	V/Hz/A	120/60/5 220-240/50/5 220/60/5	220-240/50/15-17.5
WATER USAGE			
Water Consumption	l	42.4	86
NOISE & CYCLE TIME			
Noise Level (Sound Power)	dB	Lower than 62	Lower than 62
Program Duration in Minutes (Default)	min	36	60 (60°C program)
SYSTEM & CONTROL			
Inverter Direct Drive Motor		•	•
Intelligent Electronics Controls		•	•
Heating System	W	-	3,600
Compartment Dispenser		4 compartment dispenser	3 Compartment dispenser
Forced Drain System		•	•
Pricing Program		Special Vended Price	Special Vended Price
WASH PROGRAMS			
Program List		Hot	90°C (194°F)
		Warm	75°C (167°F)
		Cold	60°C (140°F)
		Delicates	40°C (104°F)
		Add Super Wash	Cold
		-	Delicates *Rinse+Spin
EXTERNAL FINISH			
Drum		NeveRust™ Stainless Steel Drum	NeveRust™ Stainless Steel Drum
Top Plate		Porcelain (Single) / Painted Steel (Stack)	Porcelain (Single) / Painted Steel (Stack)
Transparent Glass Window Door		•	•
Colors		Bluish White / Platinum	Bluish White / Platinum
Cabinet		Painted Steel	Painted Steel
Control Panel		Painted Steel	Painted Steel
Window Display		Silk Screen	Silk Screen
Window		Aluminium	Aluminium
CIRCUIT PROTECTION			
PCB Fuse - Main Control Board	amps	8 (220-240V) 12 (120V)	8 (220-240V)
PCB Fuse - Filter Assembly	amps	15	15

	Non-Heater			Heater		
	Coin	Card	On Premise	Coin	Card	On Premise
Single	F1069FD4(P) GCWP1069QS(2)	F1069FD7(P) GCWP1069CS(2)	F1069FD3(P) GCWP1069LS(2)	F1069FD4S	F1069FD7S	F1069FD3S WD-1069BD3S
Stack	F1069FD(P) GCWP1069QD(2)	F1069FD6(P) GCWP1069CD(2)	F1069FD2(P) GCWP1069LD(2)	F1069FDS	F1069FD6S	F1069FD2S

* Dimensions and weights are approximate.
* Design, features and specifications subject to change without notice.
* Some models may not be available for sales in certain countries.

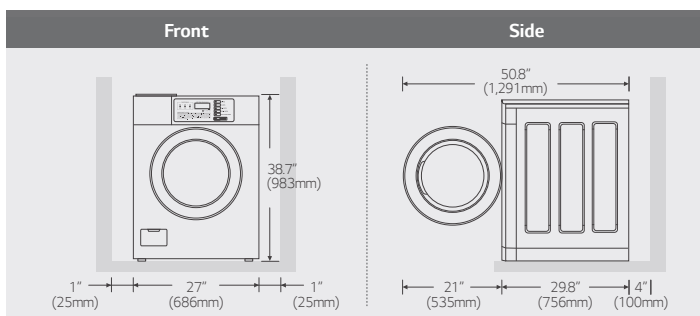

Dryer

		Gas	Electric
CYLINDER			
Drum Volume	cu.ft (l)	7.1 (201)	7.1 (201)
Diameter	in.(mm)	26.1 (663)	26.1 (663)
Depth	in.(mm)	22.5 (570.6)	22.5 (570.6)
Capacity	lb (kg)	22.5 (10.2)	22.5 (10)
DIMENSIONS			
Product (WxHxD)	in. (mm)	27 (686) x 38.7 (983) x 30.1 (764)	27 (686) x 38.7 (983) x 30.1 (764)
With Door Opening	in. (mm)	49.8 (1,264)	49.8 (1,264)
Carton (WxHxD)	in. (mm)	29.9 (760) x 46.1 (1,170) x 31.3 (795)	29.9 (760) x 46.1 (1,170) x 31.3 (795)
Weight (Product/Carton)	lb(kg)	130 (59) / 143 (65)	130 (59) / 143 (65)
OPERATION			
Electric Ratings	V/Hz/amps	120 (240)/60/26	120 (240)/60/26
		220-240/50/22.5	220-240/50/22.5
		220/60/21	220/60/21
		240/50/19.5	240/50/19.5
Heating Type		Gas	Electric
Type of Drying		Ventilation	Ventilation
Air Flow	CFM	160	160
Motor	KW	0.4 (120V/60Hz)	0.4 (120V/60Hz)
		0.3 (220-240V/50Hz)	0.3 (220-240V/50Hz)
Gas Ratings	KW/BTU	-	-
Heating Element	W	-	5,400 ²⁾
Program Duration in Minutes (Default)	min	45	45
CONNECTIONS			
Air Outlet Diameter	in.(mm)	4 (100)	4 (100)
Exhaust Airflow Diameter	in.(mm)	4 (100)	4 (100)
SYSTEM & CONTROL			
Pricing Program		Special Vended Price	Special Vended Price
Intelligent Electronic Controls		•	•
DRY PROGRAMS			
Program List		High Temp	High Temp
		Med Temp	Med Temp
		Low Temp	Low Temp
		No Heat	No Heat
EXTERNAL FINISH			
Top Plate		Painted Steel ³⁾	Painted Steel ³⁾
Transparent Glass Window Door		•	•
Colors		Bluish White / Platinum	Bluish White / Platinum
Cabinet		Porcelain (Single) Painted Steel (Stack)	Porcelain (Single) Painted Steel (Stack)
Control Panel		Painted Steel	Painted Steel
Window Display		Silk Screen	Silk Screen
Window		Aluminium	Aluminium

Gas				Electric		
	Coin	Card	On Premise	Coin	Card	On Premise
Single	RN1329AN4(S) GD1329QGS(2) RP1329AN4S	RN1329AD1(S) GD1329CGS(2)	RN1329A4(S) GD1329LGS(2) RP1329A4S	RV1329AM4(S) GD1329QES(2)	RV1329AD1(S) GD1329CES(2)	RV1329A4(S) GD1329LES(2) TD-V1329EA4
Stack Upper	RN1329AN7(S) GD1329QGU GD1329QGW(2) RP1329AN7S	RN1329AD5(S) GD1329CGU GD1329CGW(2)	RN1329A7(S) GD1329LGU GD1329LGW(2) RP1329A7S	RV1329AN7(S) GD1329QEU GD1329QEW(2)	RV1329AD5(S) GD1329CEU GD1329CEW(2)	RV1329A7(S) GD1329LEU GD1329LEW(2)
Stack Lower	RN1329AN1(S) GD1329QGD(2) RP1329AN1S	RN1329AD6(S) GD1329CGD(2)	RN1329A1(S) GD1329LGD(2) RP1329A1S	RV1329AN1(S) GD1329QED(2)	RV1329AD6(S) GD1329CED GD1329CED(2)	RV1329A1(S) GD1329LED(2)

* RN : LNG, RP : LPG * Dimensions and weights are approximate.
* Design, features and specifications subject to change without notice.
* Some models may not be available for sales in certain countries.
1) Gas rating is different by countries.
2) 4,500W for some countries due to power limitation (e.g. Australia)
3) Top plate of single dryer in bluish white is "Porcelain".

